




Temperature Range - Temperaturbereich
+20°C +68°C (+68°F +173°F)

Working Pressure - Betriebsdruck
0 - 10 bar (0 - 145 PSI)

Min. Burst Pressure - Min. Berstdruck
0 - 25 bar (0 - 362 PSI)

Material - Material
Ester Based Polyurethane (Pur)

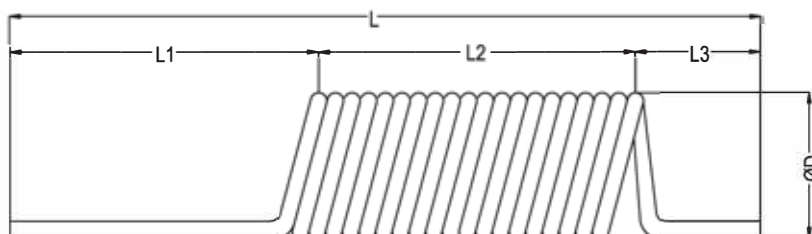

■ Spiral Hose Without end Adapters Spiralschlauch ohne Nippel

Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck		Dimensions - Dimensionen				
					Bar	PSI	L mm.	L1 mm.	L2 mm.	L3 mm.	Ø mm.
6.5x10	2 M	PHC 02.6510-000	2.0	2.5	10	145	740	500	140	100	52
	4 M	PHC 04.6510-000	4.0	5.0	10	145	930	500	330	100	52
	6 M	PHC 06.6510-000	6.0	7.5	10	145	1120	500	520	100	52
8.0x12	2 M	PHC 02.8012-000	2.0	2.5	10	145	740	500	140	100	65
	4 M	PHC 04.8012-000	4.0	5.0	10	145	920	500	330	100	65
	6 M	PHC 06.8012-000	6.0	7.5	10	145	1100	500	500	100	65
11.0x16	8 M	PHC 08.1116-000	8.0	10.0	10	145	1210	500	610	100	95

Temperature Range -Temperaturbereich
+20°C +68°C (+68°F +173°F)

Working Pressure - Betriebsdruck
0 - 10 bar (0 - 145 PSI)

Min. Burst Pressure - Min. Berstdruck
0 - 25 bar (0 - 362 PSI)

Material - Material
Ester Based Polyurethane (Pur)



Spiral Hose With Swivel and Male Threaded Adapters
Spiralschlauchset mit Aussengewindeadapter - drehbar




Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Connection Anschlüsse	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck	
						Bar	PSI
6.5x10	2 M	PHS 02.6510-R13	BSPT 1/4"	2.0	2.5	10	145
	4 M	PHS 04.6510-R13	BSPT 1/4"	4.0	5.0	10	145
	6 M	PHS 06.6510-R13	BSPT 1/4"	6.0	7.5	10	145
8.0x12	2 M	PHS 02.8012-R17	BSPT 3/8"	2.0	2.5	10	145
	4 M	PHS 04.8012-R17	BSPT 3/8"	4.0	5.0	10	145
	6 M	PHS 06.8012-R17	BSPT 3/8"	6.0	7.5	10	145
11.0x16	8 M	PHS 08.1116-R21	BSPT 1/2"	8.0	10.0	10	145

Spiral Hose With Fixed and Male Threaded Adapters
Spiralschlauchset mit Aussengewindeadapter - nicht drehbar



Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Connection Anschlüsse	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck	
						Bar	PSI
6.5x10	2 M	PHF 02.6510-R13	BSPT 1/4"	2.0	2.5	10	145
	4 M	PHF 04.6510-R13	BSPT 1/4"	4.0	5.0	10	145
	6 M	PHF 06.6510-R13	BSPT 1/4"	6.0	7.5	10	145
8.0x12	2 M	PHF 02.8012-R17	BSPT 3/8"	2.0	2.5	10	145
	4 M	PHF 04.8012-R17	BSPT 3/8"	4.0	5.0	10	145
	6 M	PHF 06.8012-R17	BSPT 3/8"	6.0	7.5	10	145
11.0x16	8 M	PHF 08.1116-R21	BSPT 1/2"	8.0	10.0	10	145



Standard 22 = ARO 210

Temperature Range-Temperaturbereich
+20°C +68°C (+68°F +173°F)


Working Pressure - Betriebsdruck
0 - 10 bar (0 - 145 PSI)

Min. Burst Pressure - Min. Berstdruck
0 - 25 bar (0 - 362 PSI)

Material - Material
Ester Based Polyurethane (Pur)

Spiral Hose With 022 Socket & 022 Plug Spiralschlauchset mit Kupplung und Nippel Serie 022 Standard ARO 210

Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck	
					Bar	PSI
6.5x10	2 M	PHF 02.6510-022	2.0	2.5	10	145
	4 M	PHF 04.6510-022	4.0	5.0	10	145
	6 M	PHF 06.6510-022	6.0	7.5	10	145
8.0x12	2 M	PHF 02.8012-022	2.0	2.5	10	145
	4 M	PHF 04.8012-022	4.0	5.0	10	145
	6 M	PHF 06.8012-022	6.0	7.5	10	145



Standard EUROPE ISO
6150 B-US MIL C 4109-1/4" (ISO B)

Spiral Hose With 023 Socket & 023 Plug Spiralschlauchset mit Kupplung und Nippel Serie 023 Standard EUROPE ISO 6150 B-US MIL C 4109-1/4"

Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck	
					Bar	PSI
6.5x10	2 M	PHF 02.6510-023	2.0	2.5	10	145
	4 M	PHF 04.6510-023	4.0	5.0	10	145
	6 M	PHF 06.6510-023	6.0	7.5	10	145
8.0x12	2 M	PHF 02.8012-023	2.0	2.5	10	145
	4 M	PHF 04.8012-023	4.0	5.0	10	145
	6 M	PHF 06.8012-023	6.0	7.5	10	145




Temperature Range - Temperaturbereich
+20°C +68°C (+68°F +173°F)

Working Pressure - Betriebsdruck
0 - 10 bar (0 - 145 PSI)

Min. Burst Pressure - Min. Berstdruck
0 - 25 bar (0 - 362 PSI)

Material - Material
Ester Based Polyurethane (Pur)




**Standard
Rectus 25
7.6 - CEJN 320**

Spiral Hose With 025 Socket & 025 Plug
Spiralschlauchset mit Kupplung und Nippel Serie 025 Standard
Rectus 025 und CEJN 320



Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck	
					Bar	PSI
6.5x10	2 M	PHF 02.6510-025	2.0	2.5	10	145
	4 M	PHF 04.6510-025	4.0	5.0	10	145
	6 M	PHF 06.6510-025	6.0	7.5	10	145
8.0x12	2 M	PHF 02.8012-025	2.0	2.5	10	145
	4 M	PHF 04.8012-025	4.0	5.0	10	145
	6 M	PHF 06.8012-025	6.0	7.5	10	145



**Standard
Rectus 027
CEJN 410**

Spiral Hose With 027 Socket & 027 Plug
Spiralschlauchset mit Kupplung und Nippel Serie 027 Standard
Rectus 027, CEJN 410



Hose Size Schlauch- grösse	Length Länge	Order No Bestellnr.	Service Length Länge (M)	Total Length Länge (M)	Working Pressure Betriebsdruck	
					Bar	PSI
6.5x10	2 M	PHF 02.6510-027	2.0	2.5	10	145
	4 M	PHF 04.6510-027	4.0	5.0	10	145
	6 M	PHF 06.6510-027	6.0	7.5	10	145
8.0x12	2 M	PHF 02.8012-027	2.0	2.5	10	145
	4 M	PHF 04.8012-027	4.0	5.0	10	145
	6 M	PHF 06.8012-027	6.0	7.5	10	145